


Speakerphone

User Manual




Version V1.0-05.02.0286

1. Packing List

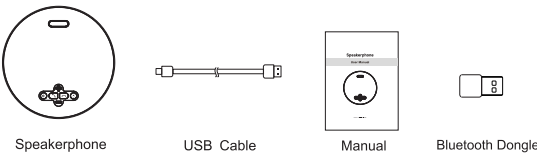

2. Charging



Plug the speakerphone into a USB power source. The device lasts for up to 18 hours of talk time and takes approximately 3.5 hours (PD charging, 5V/8000mA) to fully charge.

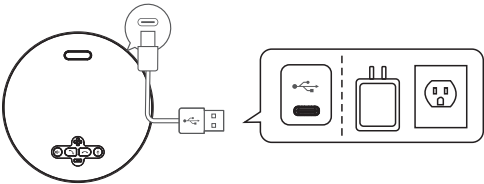

3. Low battery warning

When battery is lower than 20%, the LED around the speakerphone's logo turns red to indicate low power along with warning tone every 3 minutes.

4. Button Function

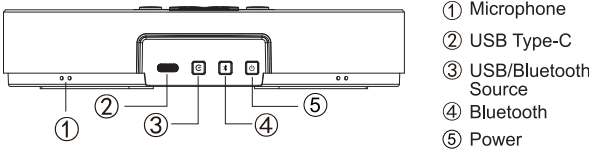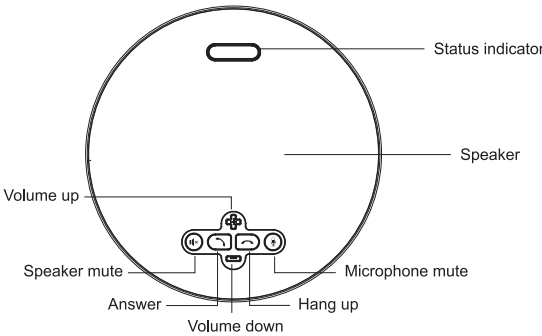

Button	Status	Function	Indicator light
	Speaker mute	ON/OFF Speaker mute	ON: Solid Green light OFF: Solid Red light
	Volume down	Decrease volume	LOGO Indicator: 16-level display
	Volume up	Increase volume	
	Answer	Answer when calling	
	Hang up	Hang up when calling	
	Microphone mute	ON/OFF microphone mute	ON: Solid Green light OFF: Solid Red light
	Bluetooth	Press to connect or disconnect Bluetooth (long press for 6 seconds to unpair Bluetooth)	ON: Solid Green light
	Power On/Off Mute/Unmute speaker and microphones (Short press)	Power On/Off (Long press) Mute/Unmute speaker and microphones (Short press)	ON: Solid Green light
	USB/Bluetooth Source	USB/Bluetooth connection	Power On: Solid Green light Press once: The light flashes blue and then turns solid green, indicating Bluetooth mode is active and ready to pair. Press again: The light changes to indicate USB mode is active.

Bluetooth status indicator	Blue light flashing	Bluetooth is pairing
	Solid Green light on	Bluetooth connected
Microphone status indicator	Solid Red light on	Microphone mute
	Solid Green light on	Microphone working normally
Speaker status indicator	Solid Red light on	Speaker mute
	Solid Green light on	Speaker working normally
Localization Indicator	When the microphones detect a sound input, the indicator light in the corresponding direction will be on.	

Note: When adjusting the volume, the blue light changes with the volume. The blue progress bar increases /decreases when adjusting the volume. When the volume is turned off, the indicator is red. After the volume is adjusted, the green light will return to on at an interval of 2s.

Warranty Card

Thank you very much for choosing our products.

User Info

Name _____ Tel _____

Email _____ Post code _____

Address _____

Product information

Product Name _____

Factory Serial Number _____

Fault description

Attention


1. This card is considered as the Protection to fix warranty, so please reserve them carefully. Please fill in truthfully.
2. Please indicate the model number, Factory Serial Number and the detailed description of the fault information.

5. Connection Introduction

When no connection is established after power-on, the speakerphone will automatically power off after 15 minutes.

Once a proper connection is confirmed, open the audio/video communication application on your computer or other audio/video devices, then select the microphone input and speaker output corresponding to the speakerphone's model to begin audio conferences.


5.1 USB Connection

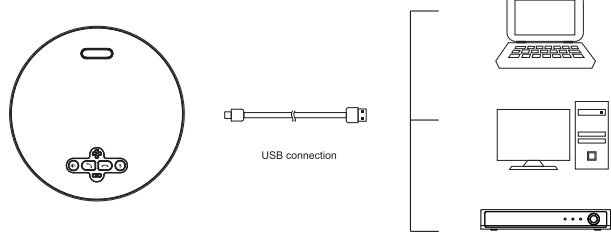

1) Once connected to your computer or other audio/video devices via USB cable, the speakerphone will automatically power on, and get ready for use.

2) If the speakerphone is connected via USB but you have a paired Bluetooth device available, you can press at any time to switch the audio connection to Bluetooth.


5.2 Bluetooth Connection

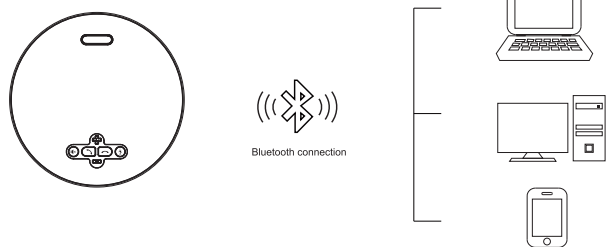

- 1) When the speakerphone is under normal working condition, press “” to turn on Bluetooth for pairing.
- 2) Put the mobile device or other audio/video devices to be connected in Bluetooth device search mode, and select the model of the speakerphone.
- 3) Each time you power on the speakerphone, it will automatically connect with the last successfully connected device if available.
- 4) To disconnect Bluetooth, please press the Bluetooth button again.
- 5) If the speakerphone is connected via Bluetooth and you wish to use a USB connection instead, simply connect the USB cable and press “” to switch inputs.


5.3 Wireless Connection

Insert the Bluetooth dongle into the USB port of your computer or other audio/video devices. The dongle has been pre-paired with the speakerphone and will be ready for use once connected.

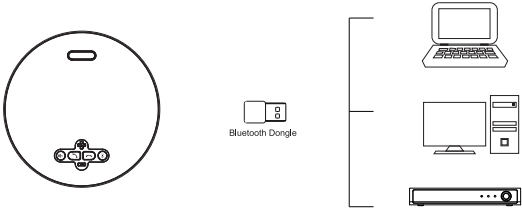


7. Pickup Range

7.1 Pickup Range

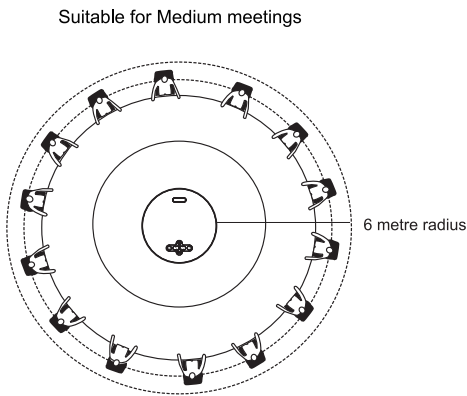

7.2 Application Scenarios




6. Technical Specifications

Item Name	USB / Bluetooth Speakerphone
Bluetooth	BT5.0
Battery	8000mAh(Built-in lithium battery); Music time (up to 18 hours); Fastest charge time: 3.5hours; Regularly charge time up: 7 hours (Support PD2.0/3.0 charging, with maximum power up to 18W)
Connection Type	USB/Bluetooth/Wireless
Meeting Room Size	15-30㎡
Meeting With	Up to 15 attendees
Pickup Range	6 meters
Mics	8x Analog Silicon Mics Array
Microphone Type	Omni-directional (360 degree pickup range)
Microphone Sensitivity	-38dB
Speaker volume	120dB
SNR	62dB
Noise Reduction	Yes
Full Duplex Audio	Yes
AEC	Yes
Frequency Range	100Hz to 20kHz
Speaker	5W/120dB
Interface	1 x Type-C
System Requirements	Windows 7/8/10 or above,MacOS 10.7 or above,Chrome OS V29.01547 or above
Application Support	Software: FaceTime, Zoom, Microsoft Teams, Hangouts, OBS, Xsplit, etc.
Working Temperature	0°~+45°C
Storage Temperature	-10°~+45°C
Working Humidity	20%~80% RH (non-condensing)
Storage Humidity	20% ~ 90% RH (non-condensing)
Power Supply	5V /3A or 9V /2A
Product Size	180mm*180mm*35,4mm/220*108*83mm(before/after packing)
Product Weight	0,61KG /0,95 KG(Net / Gross Weight)

8. Warranty

All products purchased from our company are guaranteed to keep in good repair for 36 months. If there are any quality problems during the guarantee period, we will maintain them for free. Under any of the following conditions, related maintenance costs will be collected:

- 1) Product was not normally used.
- 2) Fire, electric shock, outside object collapse or other natural disasters causing the equipment damaged.
- 3) Unauthorized repair, misuse, abuse or change.



材质：100g 书纸，双面黑白印刷

尺寸：展开前说明书大小 297*297 (wh) 左右2折3 页再对折
折叠后 99*148.5mm(wh)